

DESCRIPTION


The MX-113 is a desk mount (1 unit size) pre-amplifier mixer that comes with 6 microphone inputs, 4 AUX inputs and 2 monaural output. The microphone 1 to 5 inputs have a signal noise gate circuit that allows a signal to pass through only when it is above a set threshold. It can be mounted in an EIA rack with an optional rack mounting bracket (1U size).

SPECIFICATIONS


*0dB = 1V

Power Source	DC 19-33V, DC power in:M3 screw terminal, Barrier interval:6.4mm DC jack, from an optional AD-246 AC adapter
Current Consumption	Max 0.2A
Input	Mic 1-5 :600Ω, -62dB*(voice switch OFF), unbalanced, phone jack 600Ω, -54dB*(voice switch ON), unbalanced, phone jack (option IT-450 balance transformer) Mic 6 :600Ω, -62 dB*, unbalanced, phone jack AUX 1 :10kΩ, -12 dB*, unbalanced, RCA jack AUX 2,3:10kΩ, -12 dB*, unbalanced, phone/RCA jack AUX 4 :600Ω, -12 dB*, unbalanced, phone jack (option IT-450 balance transformer)
Output	Line output:600Ω, 0dB*, balance transformer, phone jack Record out:1kΩ, 0dB*, unbalanced, RCA jack
Remote Terminal	Withstand voltage:DC 30V, Current:1A, M3 Screw terminal Barrier interval:6.4mm
T.H.D	1 % or less (1 kHz, rated output)
Frequency Response	30 Hz - 20 kHz
Noise Level	60 dB
Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Front Panel : Aluminum, Black, Paint Case : Steel plate, Black, Paint
Dimensions	420 (W) X 50 (H) X 271 (D) mm (16.54" x 1.97" x 10.67")
Weight	2.8 kg (6.17 lb)
Accessory	Output cord(audio plug/audio plug,2m).....1
Option	AC adapter : AD-246, Rack mount bracket : MB-15B


APPEARANCE

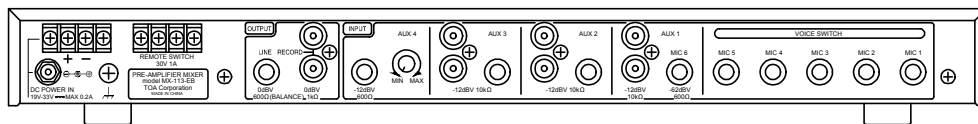

Rear View

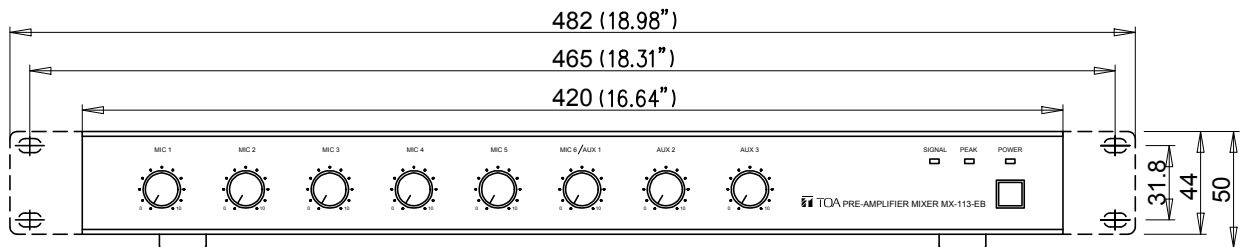

Front View

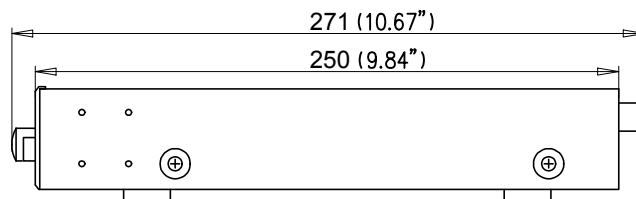

Side View

UNIT:mm SCALE:1/3