

■ DESCRIPTION

Column Speaker is suitably designed for indoor and outdoor use.

Efficient for use in a spacious room.

The speaker unit is designed to reproduce sound with good clarity and high input power capacity.

The plastic column speaker comes with speaker bracket as accessories.

The speaker bracket offers better installation flexibility.

■ SPECIFICATIONS

Model no.		TZ-206BWP Q-TEE	TZ-206WWP Q-TEE
Enclosure		Sealed type	
Rated input		20 W	
Rated impedance		100V line: 500 Ω (20 W), 1 kΩ (10 W), 2 kΩ (5W), 4 kΩ (2.5W) 70V line: 500 Ω (10 W), 1 kΩ (5 W), 2 kΩ (2.5W), 4 kΩ (1.3W)	
Sensitivity		89 dB (1 W, 1 m)	
Frequency response		150 - 13,000 Hz	
Speaker components		10 cm (4") cone type x2	
Input terminals		Push-in terminals	
Water protection		IP65	
Finish	Enclosure	HIPS, Black, paint	HIPS, white, paint
	Punched net	Surface-treated steel plate, paint, black	Surface-treated steel plate, paint, white
	Speaker bracket	Aluminum die-cast, black, paint	
	Joint bracket wall bracket	Steel plate, 1.6mm, black, paint (ED coating)	
Dimensions		135 (W) x 250 (H) x 128 (D) mm (5.31" x 9.84" x 5.04")	
Weight		1.9 kg (4.18 lb) without accessories	
Accessories		Speaker bracket: 1, Joint bracket: 1, Wall bracket: 1, Fixing bolt M5 x 60: 1, Hexagon bolt M6 x 12 (with plain washer and spring washer): 2, Machine screw M5 x 20 (with plain washer and spring washer): 2, Hexagon bolt M8 x 15: 1, Tapping screw 4 x 12:4, Terminal cover: 1	
Option		Speaker stand: ST-16A	

Note: The design and specifications are subject to change without notice for product improvement.

■ APPEARANCE

All units in mm




[Top]




[Bottom]


M8 screw hole
(bolt's length max. 10 mm)
For mounting on a stand

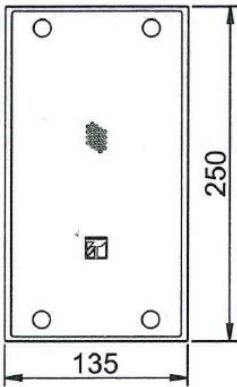

[Front]

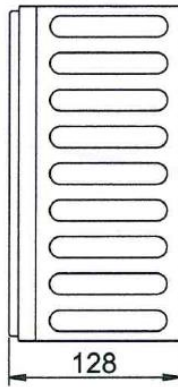

[Side]

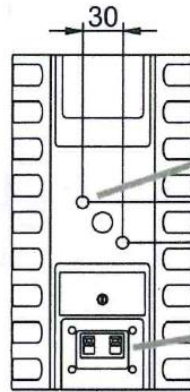

[Rear]

M5 screw hole
(bolt's length max. 13 mm)
For bracket mounting

Input terminal