


■ DESCRIPTION

The VX-300SM is a 3 wires end of line monitor module, speaker line failure can be detected with greater accuracy when a VX-300SM module specifically designed for 100V speaker line is connected between the VX-300SV and the control input terminal of the VX-3000F series.

■ SPECIFICATIONS

Power Source	19-33V DC , screw connector 2P
Current Consumption	100mA
Control input	8 inputs , No-voltage make contact input , open voltage: 12 V DC, short-circuit current: 0.1mA , screw connector 8P.
Control output	8 inputs , No-voltage make contact electrical contact output, control current : 10 mA , withstand voltage : 28 V DC. Connector : RJ45 connector Connector Cable : Shielded Category 5 twisted pair cable(CAT5-STP)
Operating Temperature	-5°C to + 45°C(23F to 113F)
Operating Humidity	90% RH or less (no condensation)
Dimensions	133(W)X72(H)X20(D)mm (5.24" X 2.83" X 0.79")
Weight	70g(0.15 lb)
Accessory	Mounting foot ... 2

■ APPEARANCE

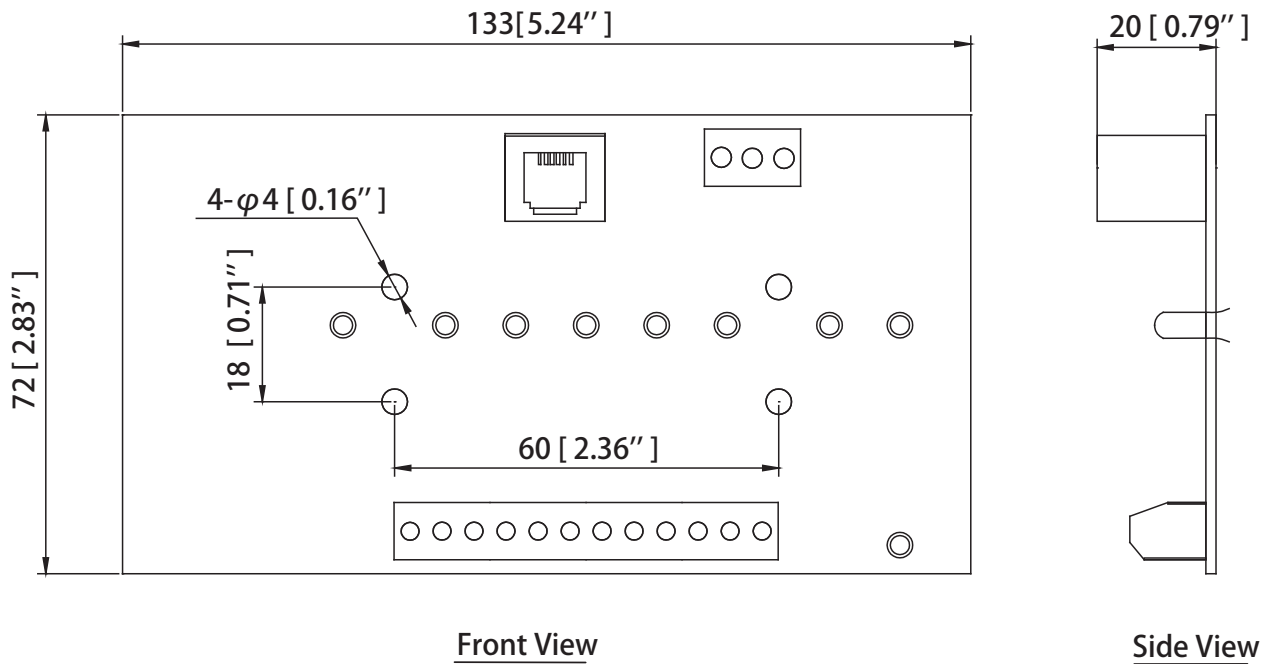

UNIT:mm SCALE:4/5