


DESCRIPTION

The PC-391T is a small flush-mount wall speaker. Its ideal applications include hotel and hospital rooms, and reception counters in the banks and clinics.

SPECIFICATIONS

| | |
|----------------------|--|
| Rated Input | 3 W |
| Rated Impedance | 3.3 kΩ |
| Sound Pressure Level | 86 dB (1 W, 1 m) |
| Frequency Response | 150 Hz - 18 kHz |
| Speaker Component | 7.7 cm cone-type speaker |
| Attenuation | 0 (OFF), 1 (-12 dB), 2 (-6 dB), 3 (0 dB) |
| Finish | Baffle: Stainless steel Grille: Aluminum, silver |
| Dimensions | 162 (W) × 115 (H) × 47 (D) mm (excluding the projection parts such as a switch knob) |
| Weight | 600 g |
| Accessory | Switch box mounting screw4, Speaker mounting screw4, Wood screw4 |

APPEARANCE

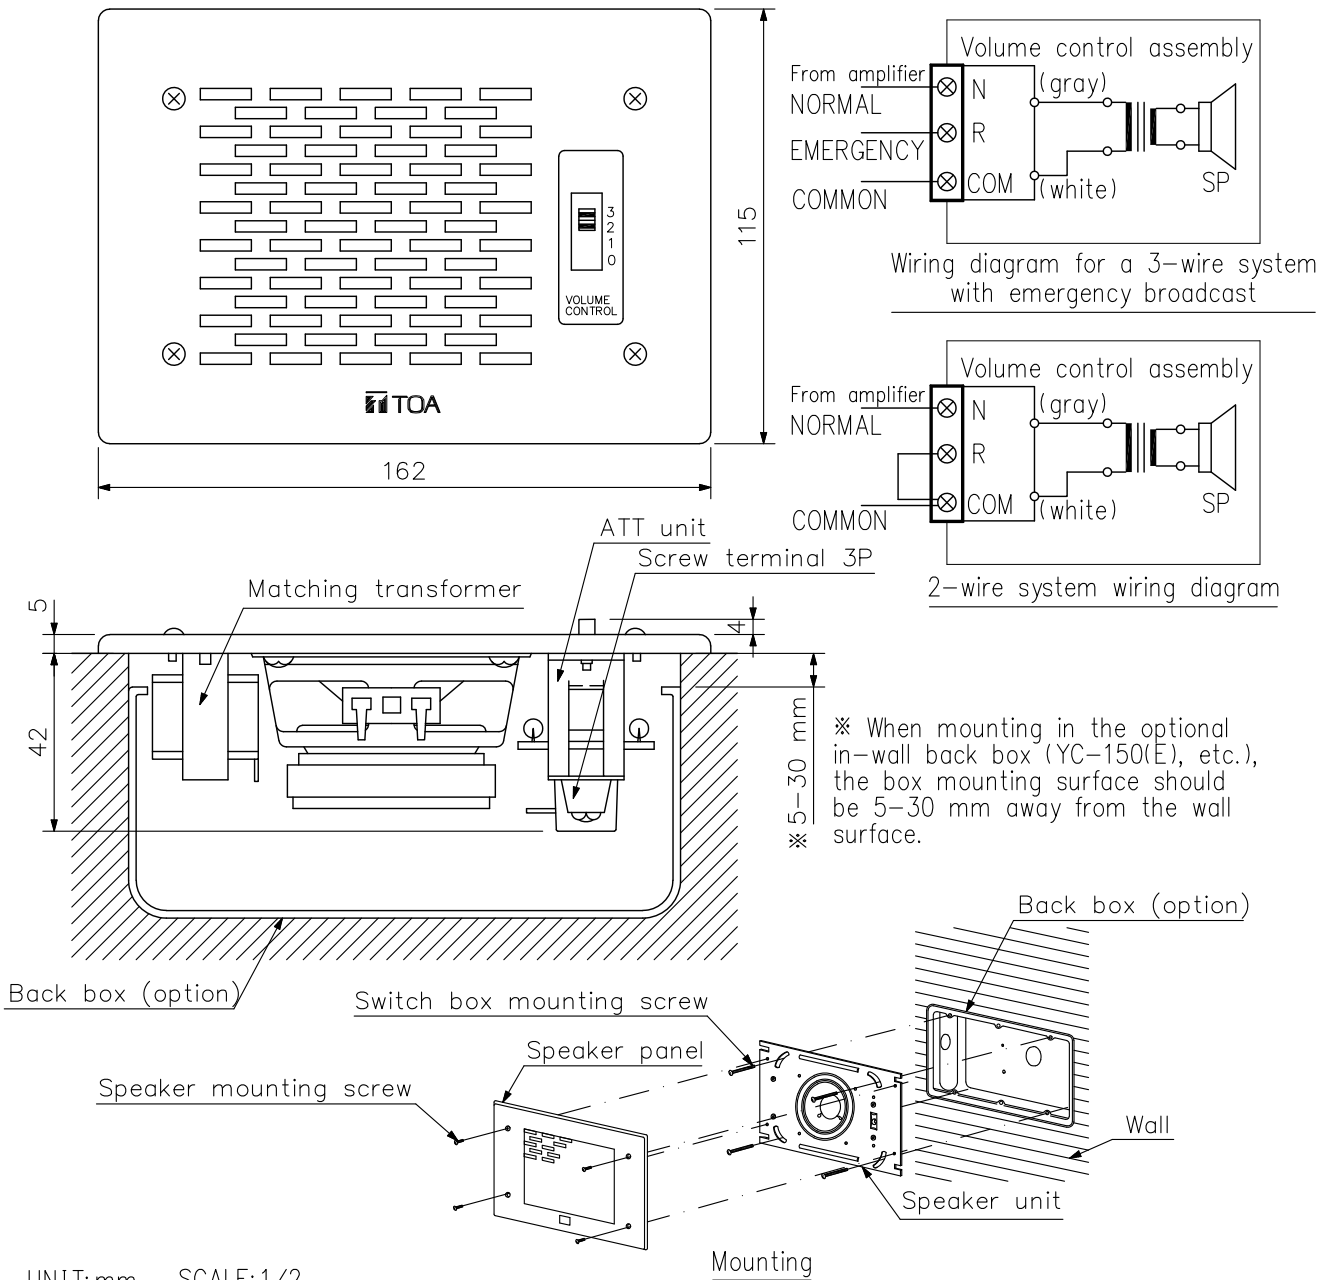

Wiring diagram for a 3-wire system with emergency broadcast

2-wire system wiring diagram

※ When mounting in the optional in-wall back box (YC-150(E), etc.), the box mounting surface should be 5-30 mm away from the wall surface.